




ALUMINUM MISCELLENEOUS

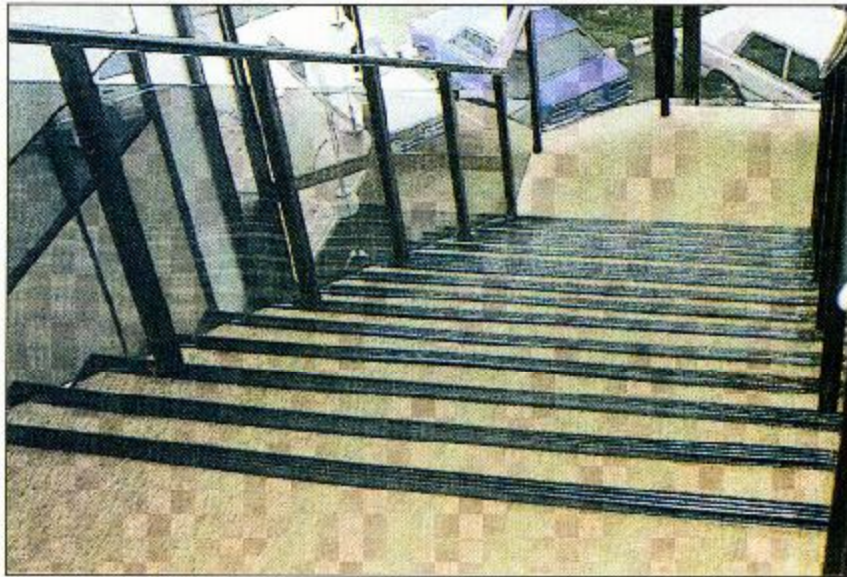

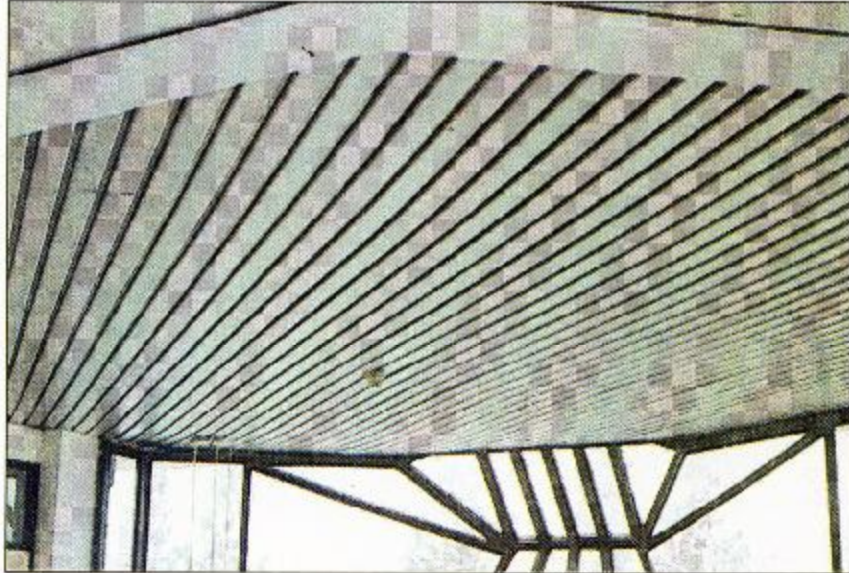

Architectural Application


Door Handle

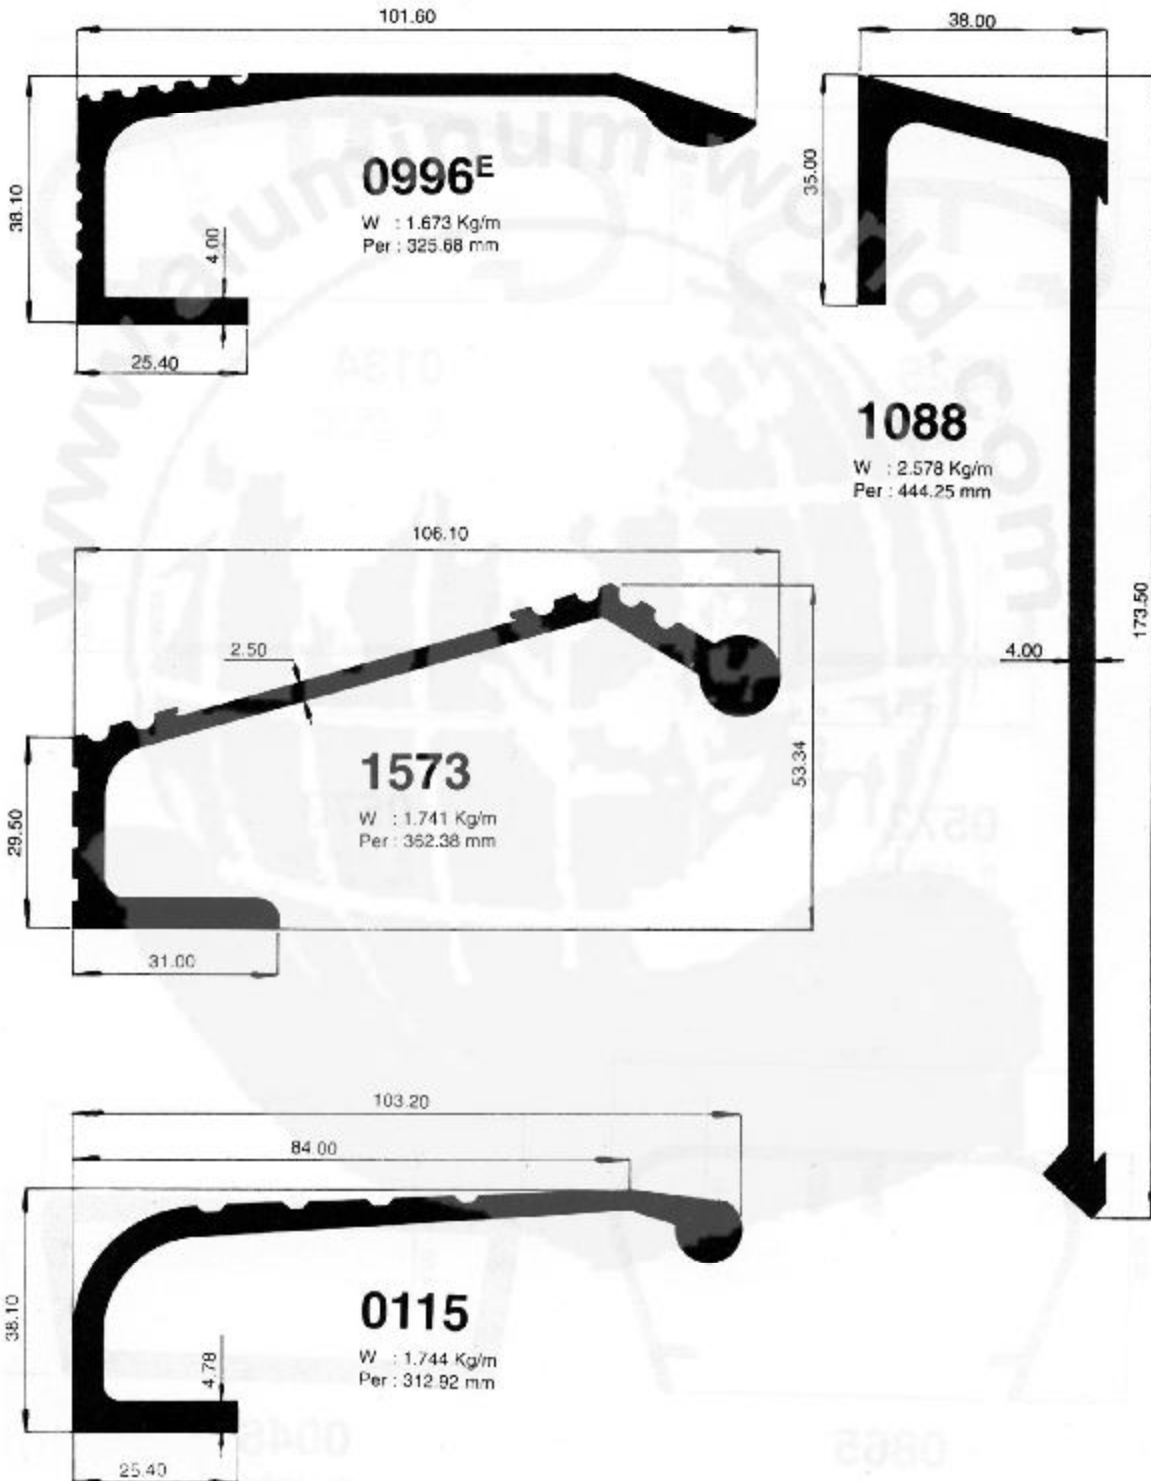



Architectural Application

Door Handle

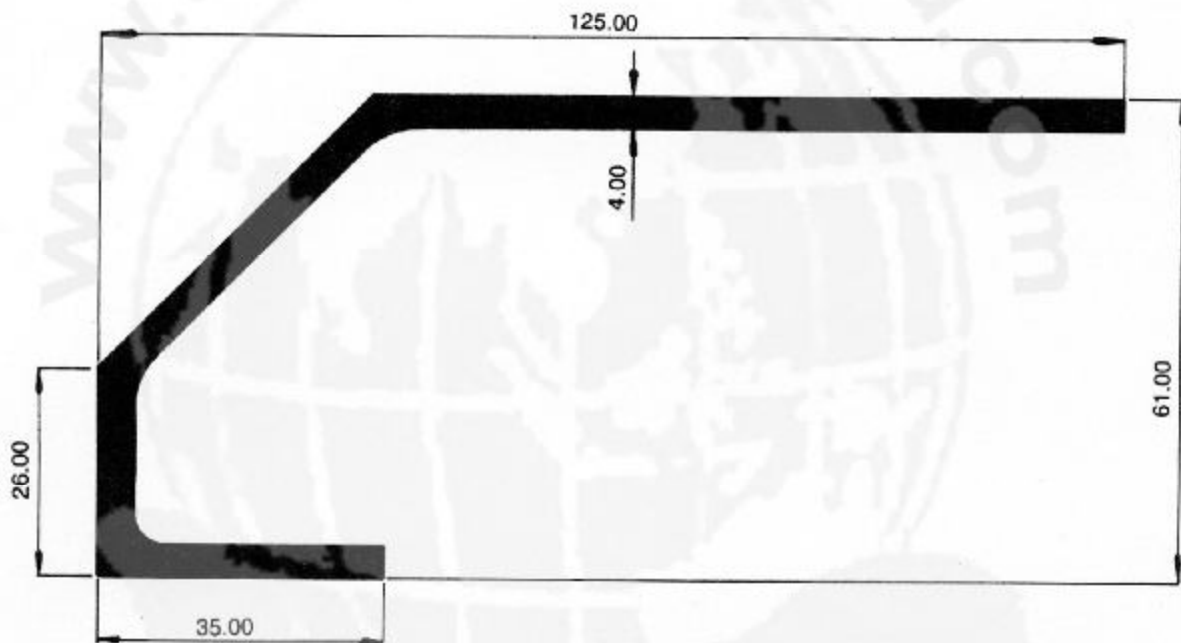


1679

W : 2.145 Kg/m
Per : 405.17 mm




Architectural Application

Glazing Beads



0367

W : 0.128 Kg/m
Per : 92.30 mm

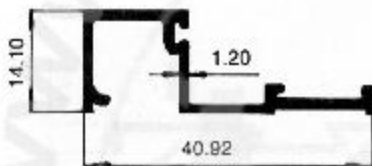


0366^R

W : 0.267 Kg/m
Per : 162.12 mm




0879

W : 0.389 Kg/m
Per : 195.01 mm




1639

W : 0.159 Kg/m
Per : 68.54 mm




1038

W : 0.129 Kg/m
Per : 80.46 mm




1640

W : 0.089 Kg/m
Per : 68.36 mm




1039

W : 0.191 Kg/m
Per : 107.80 mm

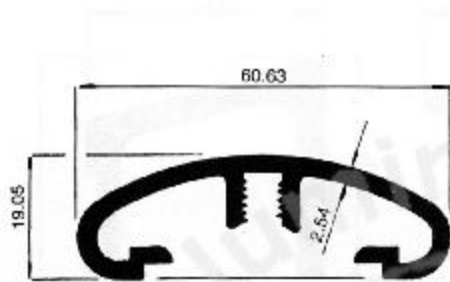

0325

W : 0.879 Kg/m
Per : 229.97 mm

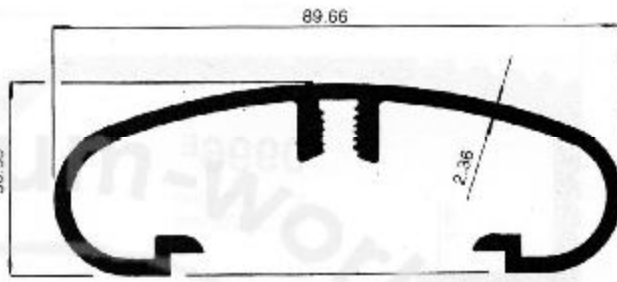


0134

W : 1.223 Kg/m
Per : 382.57 mm




0572

W : 0.283 Kg/m
Per : 108.40 mm

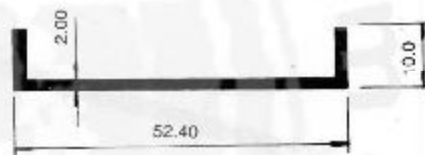


0573

W : 0.371 Kg/m
Per : 140.80 mm

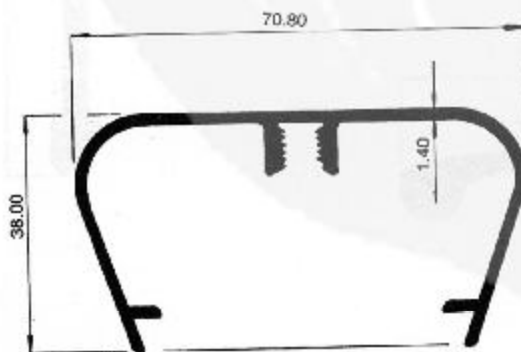

0865

W : 0.665 Kg/m
Per : 360.20 mm

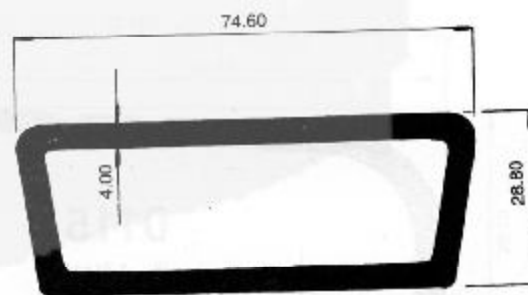


0046

W : 1.960 Kg/m
Per : 193.59 mm




0640

W : 0.226 Kg/m
Per : 157.68 mm

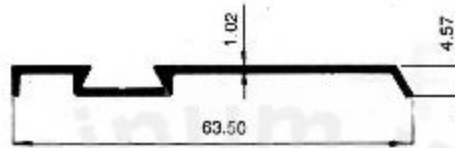


1620

W : 0.341 Kg/m
Per : 227.84 mm

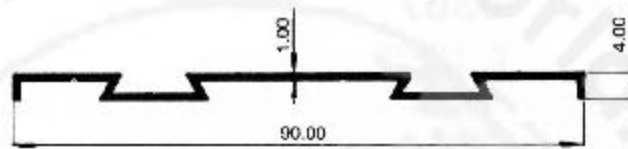


1619

W : 0.341 Kg/m
Per : 247.84 mm

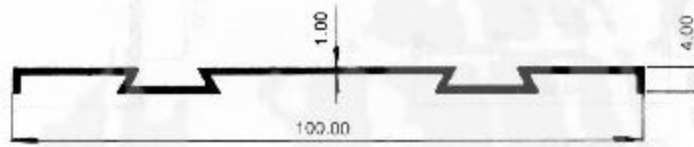


1059^E

W : 0.397 Kg/m
Per : 251.96 mm

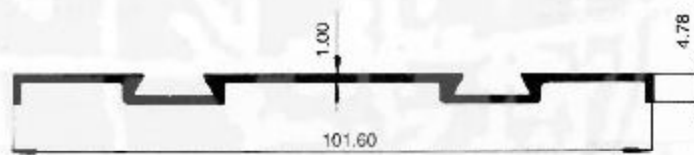

0638

W : 0.460 Kg/m
Per : 255.22 mm

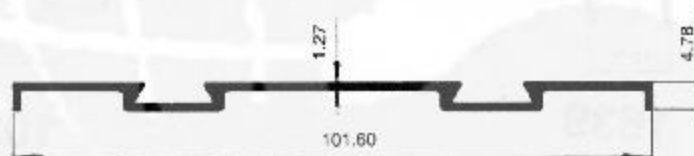

1833

W : 0.320 Kg/m
Per : 229.52 mm



1630

W : 0.206 Kg/m
Per : 155.79 mm

